




SKF BEARING rolling stock(Europe) G.m...

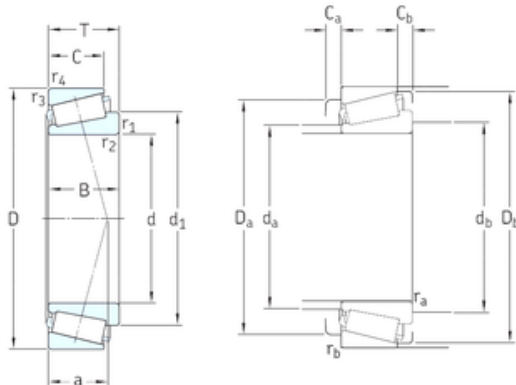

240 mm x 360 mm x 76 mm SKF 32048X tapered roller bearings

Bearing No. 32048X

32048X Bearing 2D drawings and 3D CAD models

| | |
|----------------|---------------|
| Size | 240x360x76 mm |
| Bore Diameter | 240 mm |
| Outer Diameter | 360 mm |
| Width | 76 mm |
| d | 240 mm |
| D | 360 mm |
| T | 76 mm |
| B | 76 mm |
| C | 57 mm |
| a | 78 mm |
| d1 | 300 mm |
| r1 min. | 4 mm |
| r2 min. | 4 mm |
| r3 min. | 3 mm |
| r4 min. | 3 mm |
| Ca min. | 12 mm |
| Cb min. | 19 mm |
| da max | 261 mm |
| Da min | 318 mm |
| Da max. | 346 mm |
| db min | 254 mm |
| Db min. | 346 mm |
| ra max. | 4 mm |
| rb max. | 3 mm |
| Weight | 26,5 Kg |
| | |



SKF BEARING rolling stock(Europe) G.m...

| | |
|-------------------------------|------------|
| Basic dynamic load rating (C) | 935 kN |
| Basic static load rating (C0) | 1800 kN |
| Fatigue load limit (Pu) | 156 |
| Reference speed | 1200 r/min |
| Limiting speed | 1600 r/min |
| Calculation factor (e) | 0,46 |
| Calculation factor (Y) | 1,3 |