




# SKF BEARING rolling stock(Europe) G.m...

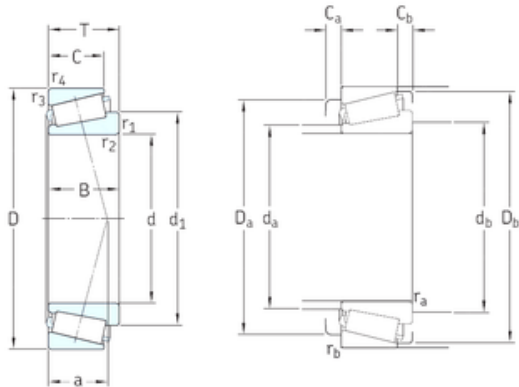

66,675 mm x 112,712 mm x 30,048 mm SKF  
3984/2/3920/2/Q tapered roller bearings

Bearing No. 3984/2/3920/2/Q

3984/2/3920/2/Q Bearing 2D drawings and 3D CAD models

Size	66.675x112.712x30.162 mm
Bore Diameter	66,675 mm
Outer Diameter	112,712 mm
Width	30,162 mm
d	66,675 mm
D	112,712 mm
T	30,162 mm
B	30,048 mm
C	23,812 mm
a	25 mm
d1	87,9 mm
r1 min.	3,5 mm
r2 min.	3,5 mm
r3 min.	3,3 mm
r4 min.	3,3 mm
Ca min.	4 mm
Cb min.	6 mm
da max	75 mm
Da min	96 mm
Da max.	101 mm
db min	78,5 mm
Db min.	105 mm
ra max.	3,3 mm
rb max.	3,1 mm
Weight	1,15 Kg



## SKF BEARING rolling stock(Europe) G.m...

Basic dynamic load rating (C)	123 kN
Basic static load rating (C0)	183 kN
Fatigue load limit (Pu)	21,2
Reference speed	4300 r/min
Limiting speed	6300 r/min
Calculation factor (e)	0,4
Calculation factor (Y)	1,5
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	7316573301073
Product Group	B04334